


## slash\_E

### TECHNICAL SPECIFICATION

Type:	knitted
Coating:	polyurethane
Material:	knitwear with anti-cut properties
Cuff:	integrated, elastic
Weight:	light
Sizes:	6, 7, 8, 9, 10, 11

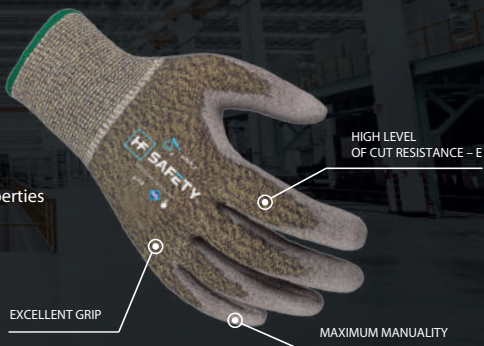

### DESCRIPTION

Gloves with excellent parameters of mechanical resistance. Extremely thin, they guarantee excellent feel and cut protection at E level. The breathable polyurethane coating provides excellent grip in dry conditions. The gloves contain Actifresh Sanitized® agent for antibacterial protection and the highest comfort of use. Compatible with touch screens.

### APPLICATIONS

Work in high-risk cutting environments. Work with sheet metal and glass, any work requiring additional protection against mechanical hazards.



EN 388:2016+A1: 2018



Abrasion resistance	4
Blade cut resistance	X
Tear resistance	4
Puncture resistance	2
ISO 13997 TDM	E

EN 407:2004



Burning Behavior	X
Contact Heat	1
Convective Heat	X
Radiant Heat	X
Small Splashes of Molten Metal	X
Large Quantities of Molten Metal	X



PPE regulation (EU) 2016/425

[ EN ISO 21420:2020 General requirements for protective gloves | EN 388:2016+A1:2018 Mechanical resistance | EN 407:2004 Protection against heat and/or flame

P.H.P.U. SEMEX Fertacz, Huszno Sp. J.  
ul. Jagiellońska 101/105,  
42-202 Częstochowa, Poland  
tel.: +48 34 39 06 735  
e-mail: bhp@semex.pl  
www.hfsafety.pl

ODDZIAŁ KRAKÓW  
ul. Biskupińska 28, budynek X  
30-732 Kraków  
tel.: +48 12 390 46 00  
e-mail: bhp.krakow@semex.pl  
www.hfsafety.pl

